



DXD-20ZM

工作条件 Working Conditions

介质温度：5-50℃
环境温度：≤50℃
湿度：65% RH
最大工作压力：0.4Mpa
Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Humidity: 65% RH
Max.working pressure: 0.4Mpa

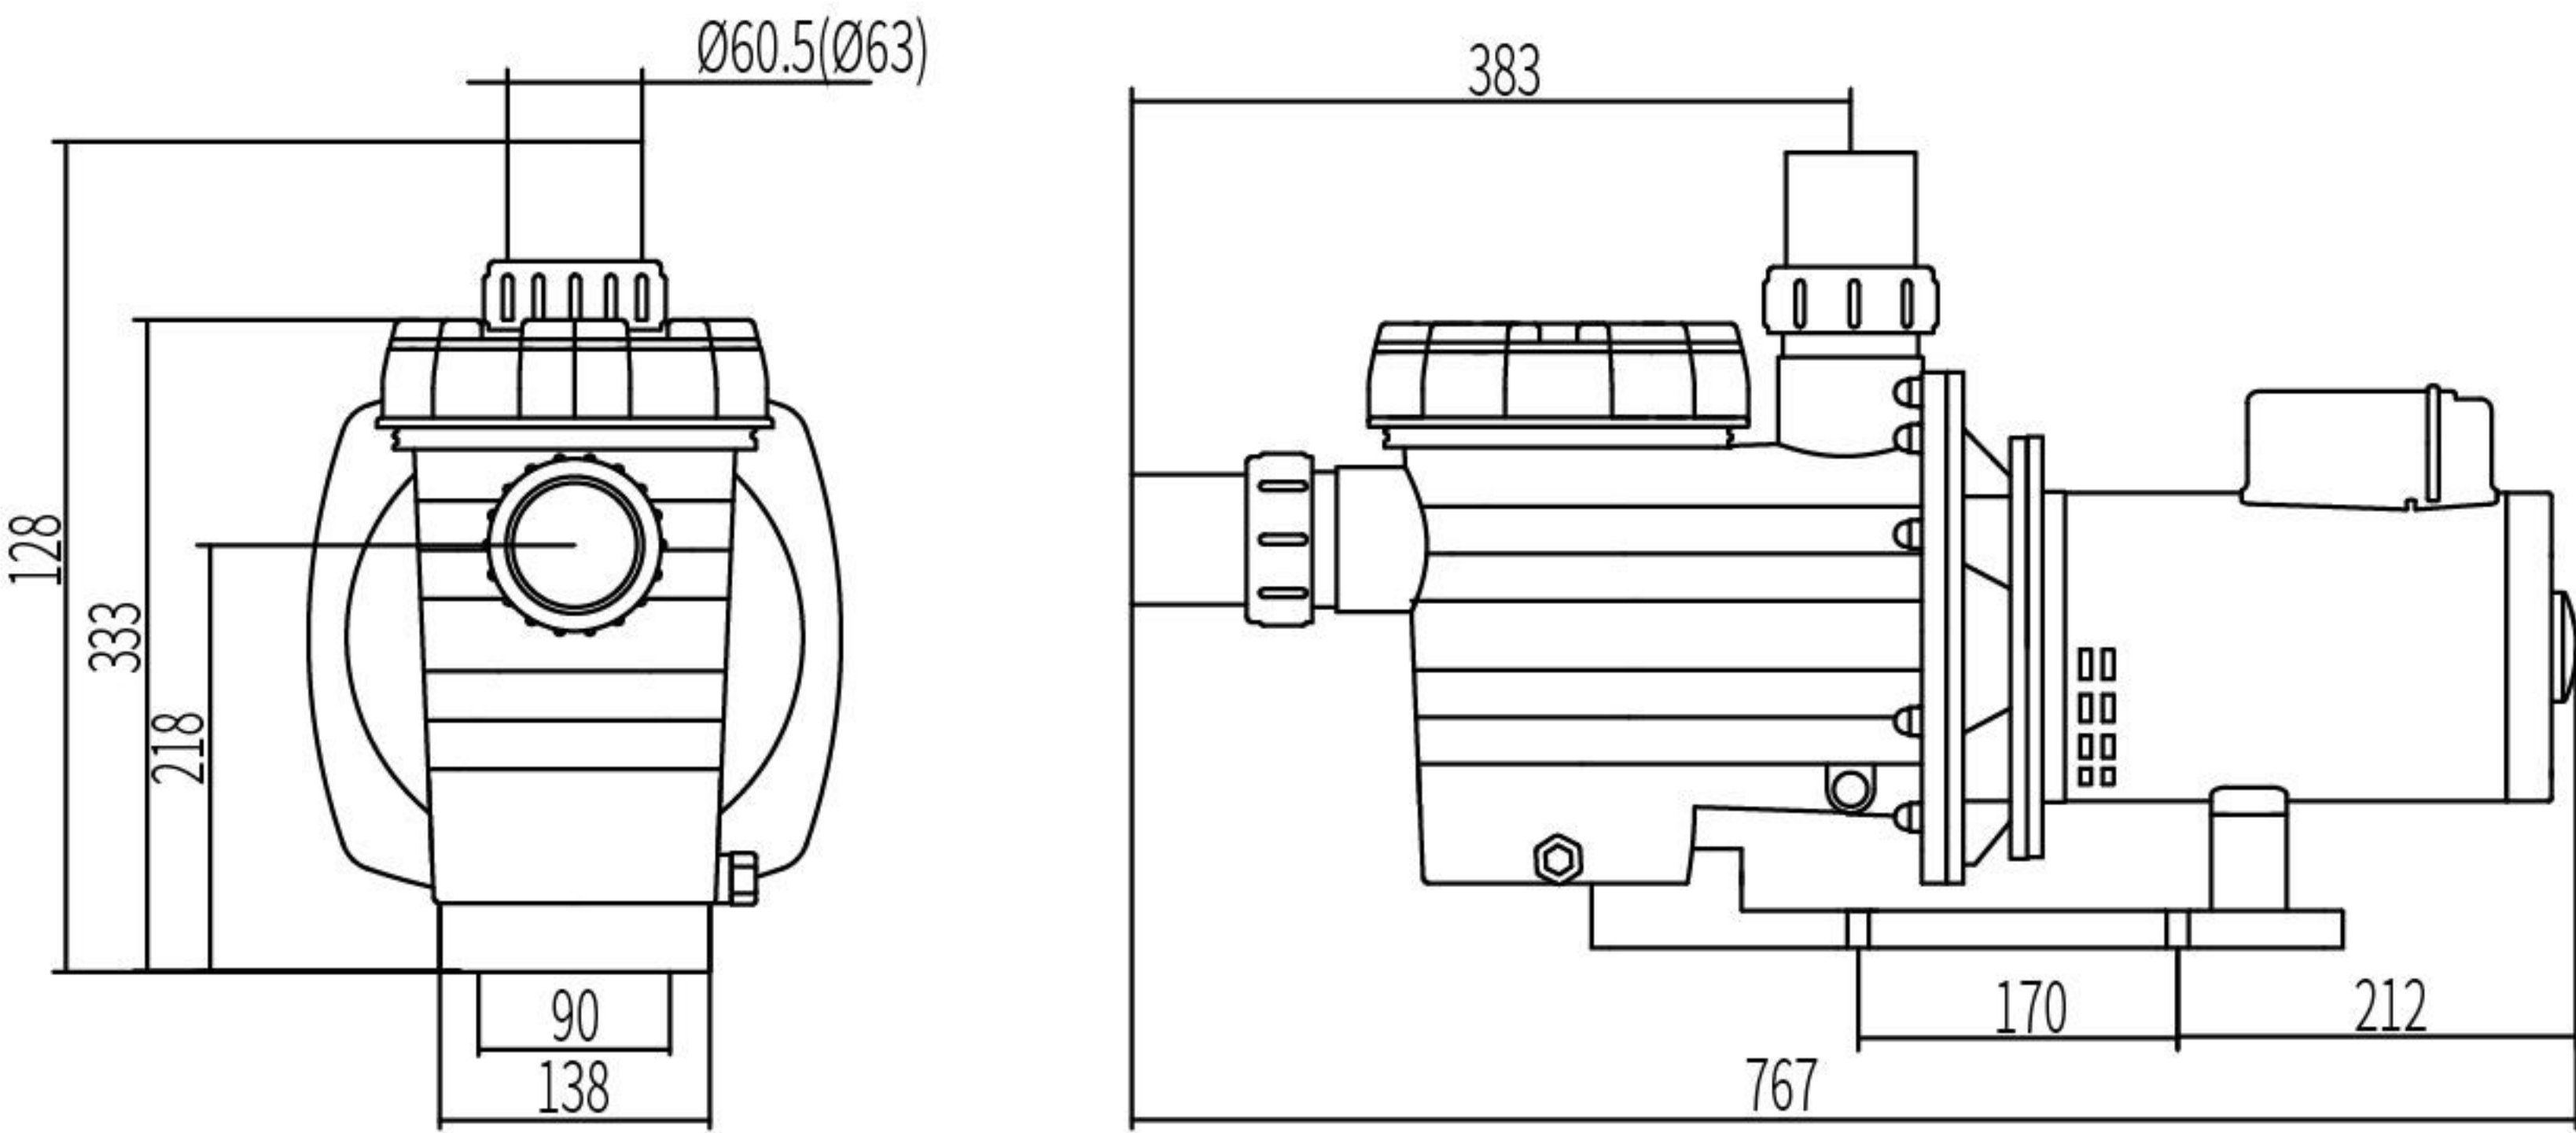

性能曲线 Performance Curves

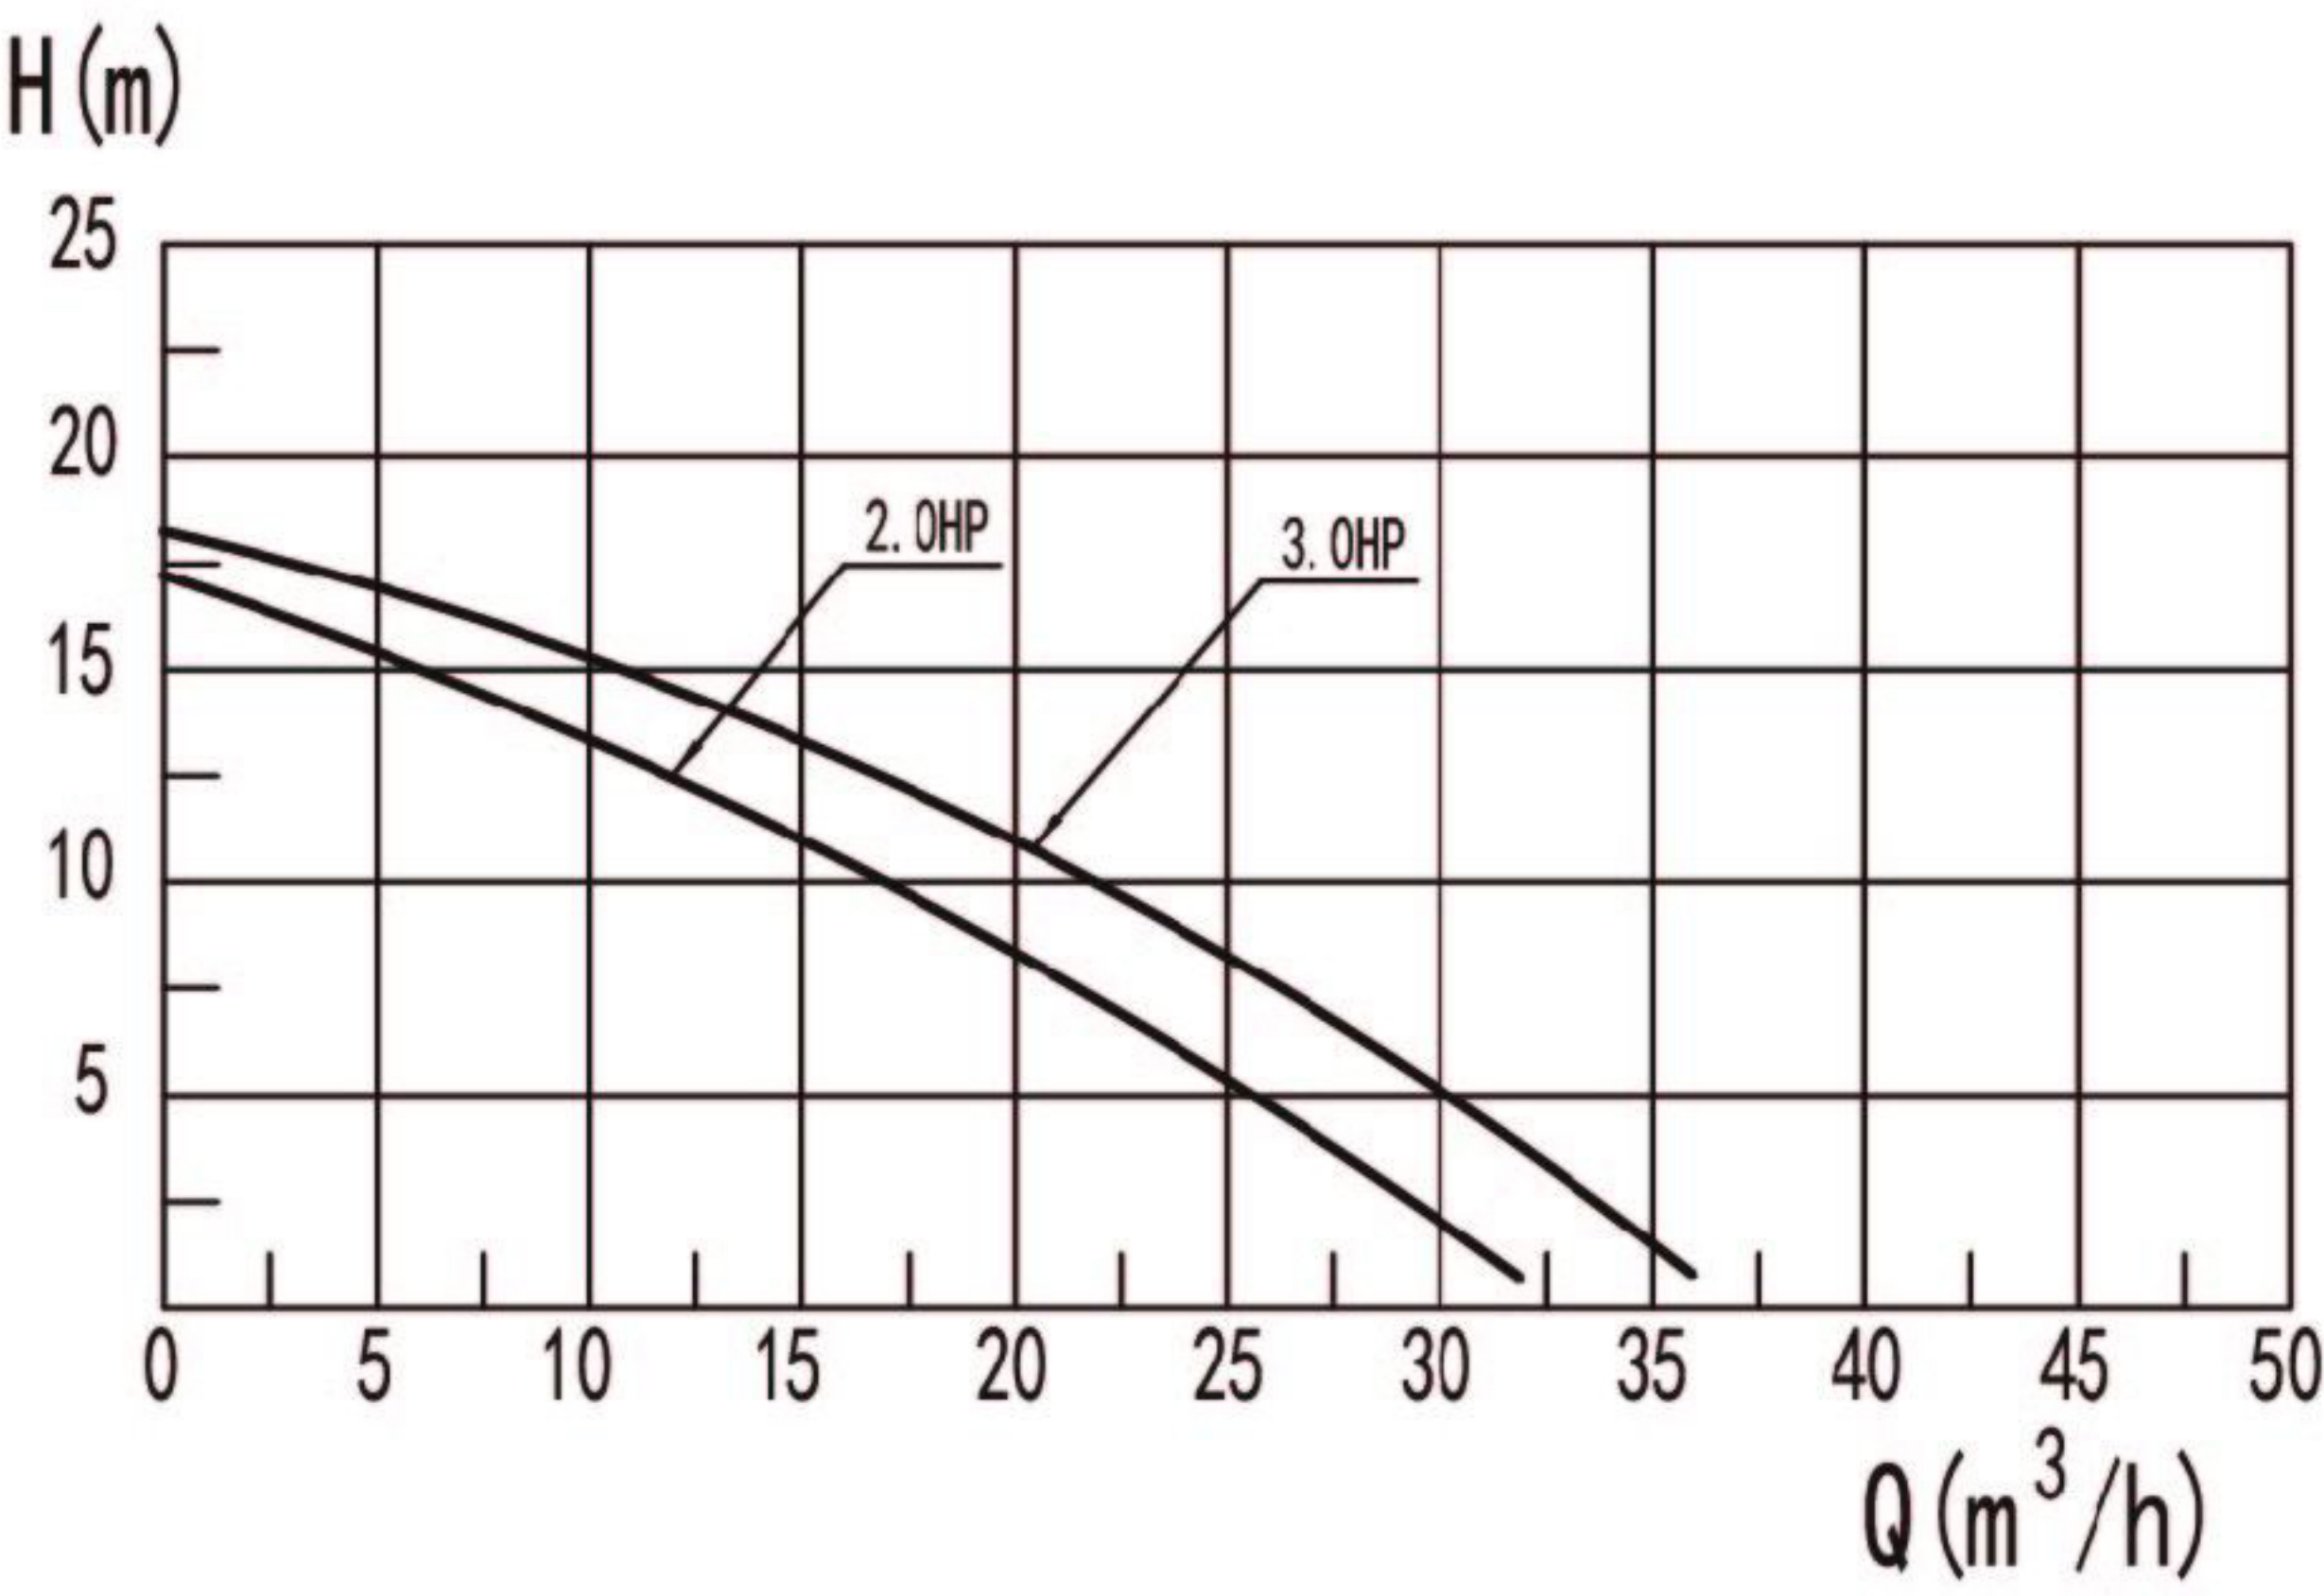

技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum Lift (m)	最大流量 Maximum Flow (m³ /h)	绝缘等级 Insulation Class	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP						
DXD-20ZM	230v/50Hz	1.5	2.0	2850	17.0	32	F	17.0	
DXD-20ZM	230v/60Hz	1.5	2.0	3450	17.0	32	F	17.0	
DXD-20ZM	115v/60Hz	1.5	2.0	3450	17.0	32	F	17.0	
DXD-30ZM	230v/50Hz	2.1	3.0	2850	18.0	36	F	18.0	
DXD-30ZM	230v/60Hz	2.1	3.0	3450	18.0	36	F	18.0	
DXD-30ZM	115v/60Hz	2.1	3.0	3450	18.0	36	F	18.0	
DXD-20ZM	380v/50Hz	1.5	2.0	2850	17.0	32	F	17.0	
DXD-30ZM	380v/50Hz	2.1	3.0	2850	18.0	36	F	18.0	

包装 (Packing): 750mm×295mm×465mm
可选配定时功能和无水保护装置 Optional function: Timer&No Water Protection