



DXD-315AS

工作条件 Working Conditions

介质温度: 5-50°C
环境温度: ≤50°C
湿度: 65% RH
最大工作压力: 0.4Mpa
Medium temperature: 5-50°C
Environmental temperature: ≤50°C
Humidity: 65% RH
Max.working pressure: 0.4Mpa

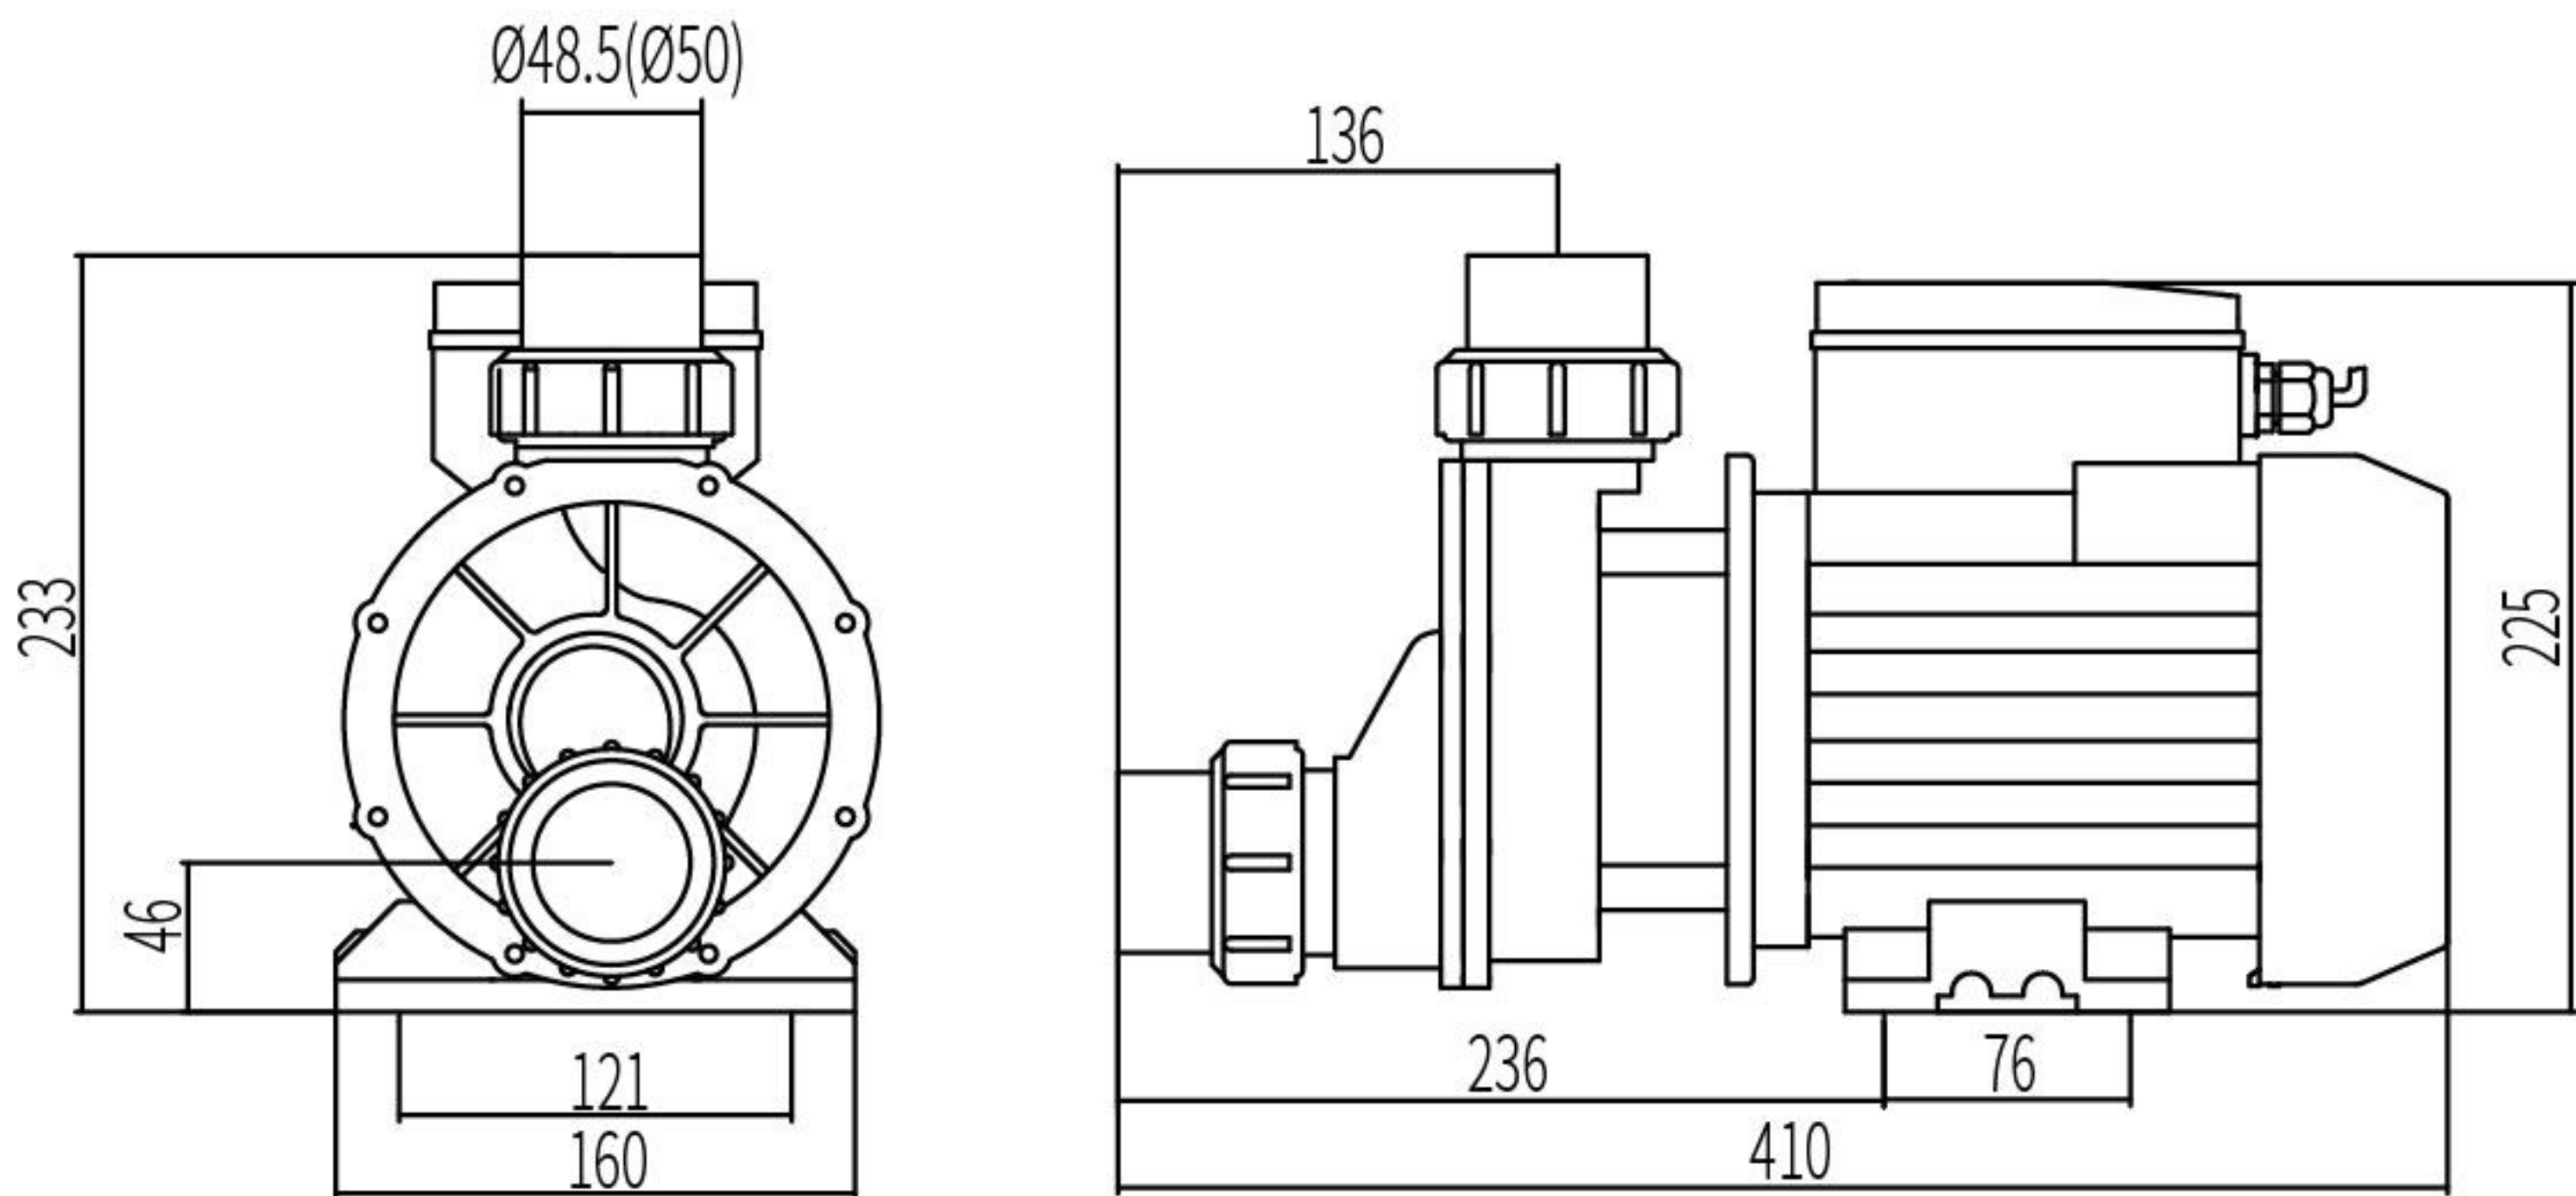

性能曲线 Performance Curves

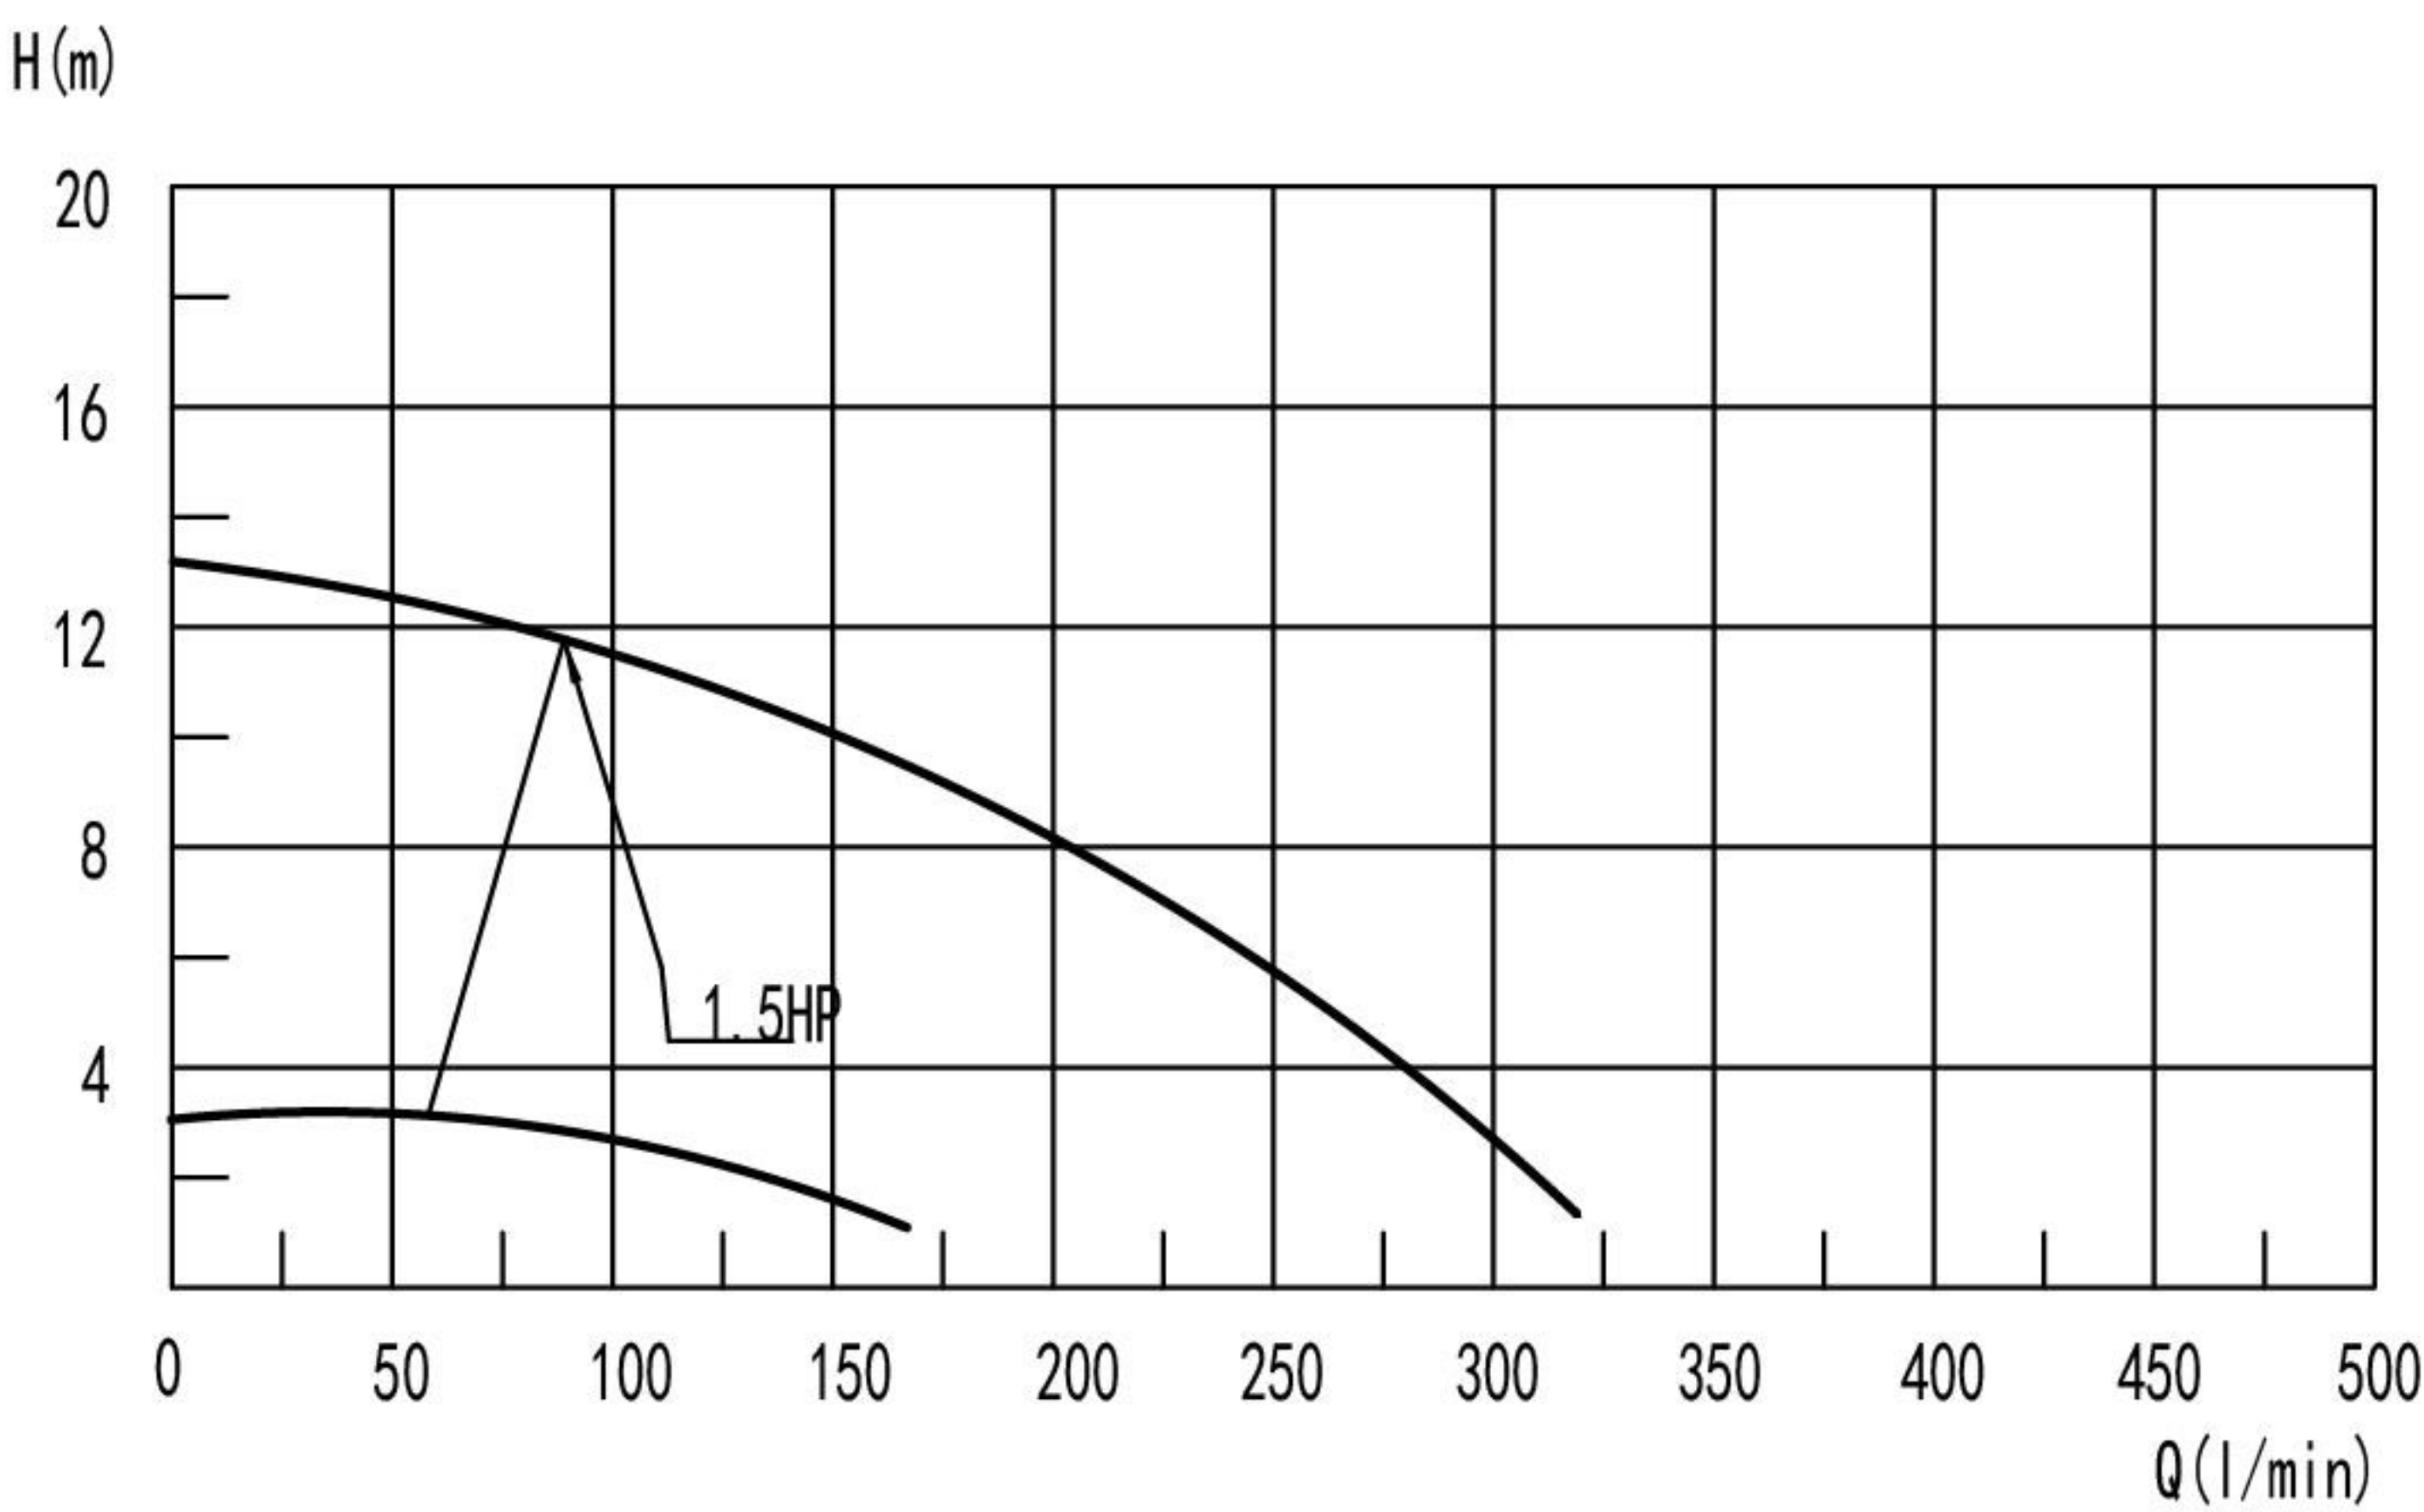

 E351970  E351970
 EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008
 EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008

技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum Lift (m)	最大流量 Maximum Flow (l/min)	绝缘等级 Insulation Class	防护等级 Protection Grade	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP							
DXD-315AS	230v/50Hz	(high speed) 1.1	1.5	2850	13.0	333	F	IP X5	16.0	 
		(low speed) 0.25	0.35	1450	3.0	167				
DXD-315CS	230v/60Hz	(high speed) 1.1	1.5	3450	13.0	333	F	IP X5	16.0	
		(low speed) 0.25	0.35	1725	3.0	167				
DXD-315DS	115v/60Hz	(high speed) 1.1	1.5	3450	13.0	333	F	IP X5	16.0	
		(low speed) 0.25	0.35	1725	3.0	167				

包装 (Packing): 400mm×170mm×250mm