



DXD-320ES

工作条件 Working Conditions

介质温度:5-50℃
环境温度:≤50℃
湿度:65%RH
最大工作压力:0.4Mpa
Medium temperature:5-50℃
Environmental temperature:≤50℃
Humidity: 65% RH
Max.working pressure: 0.4Mpa

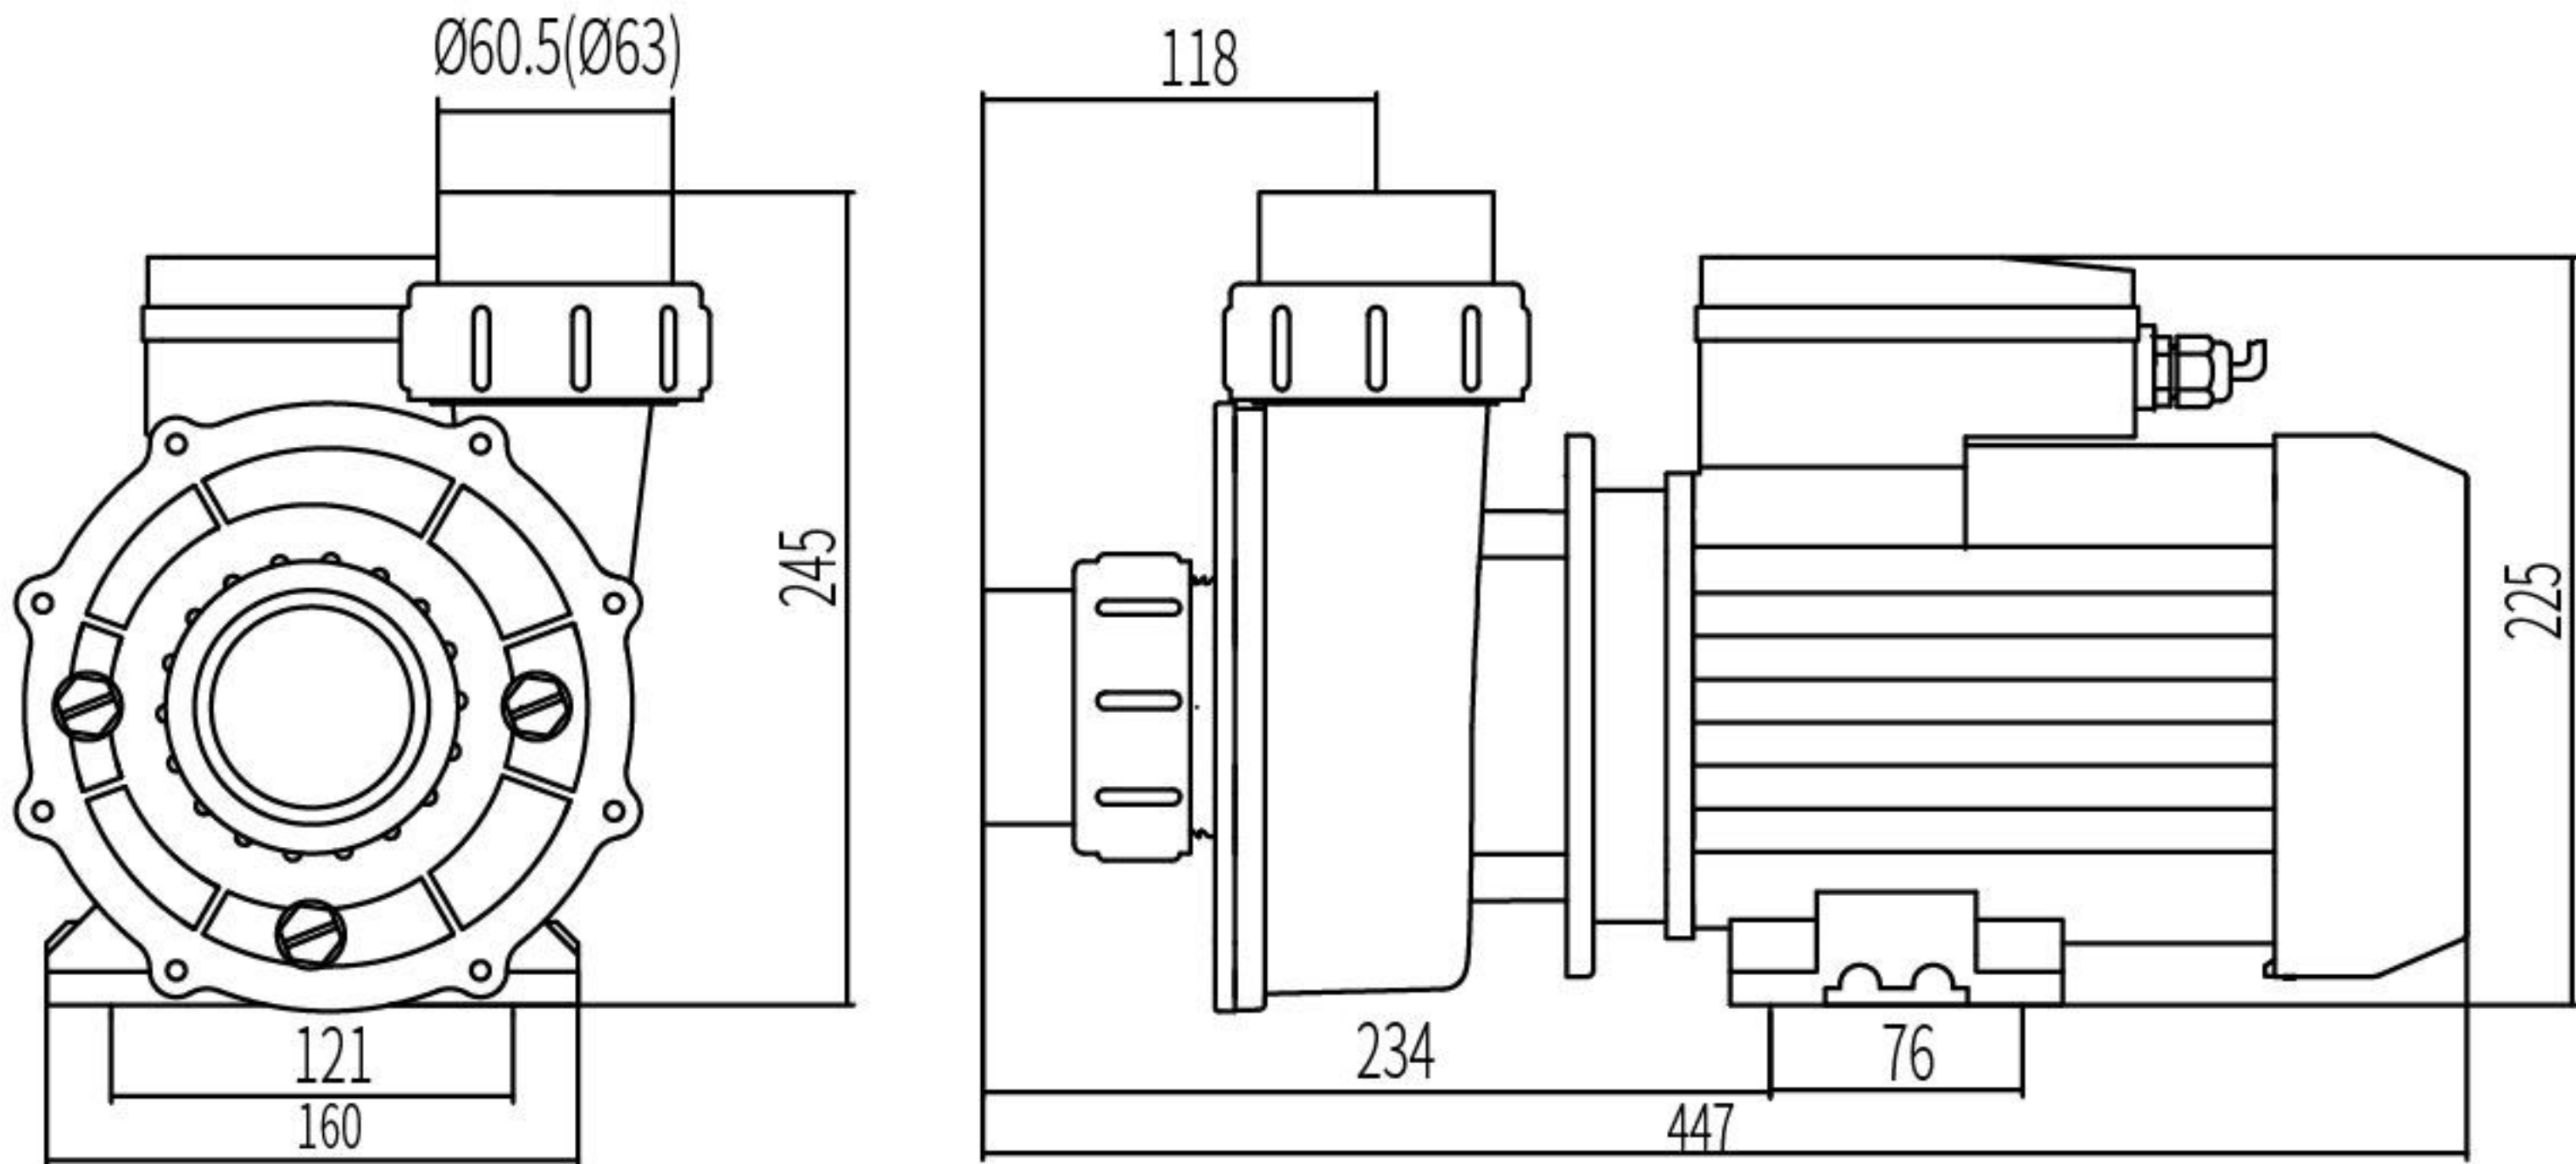

性能曲线 Performance Curves

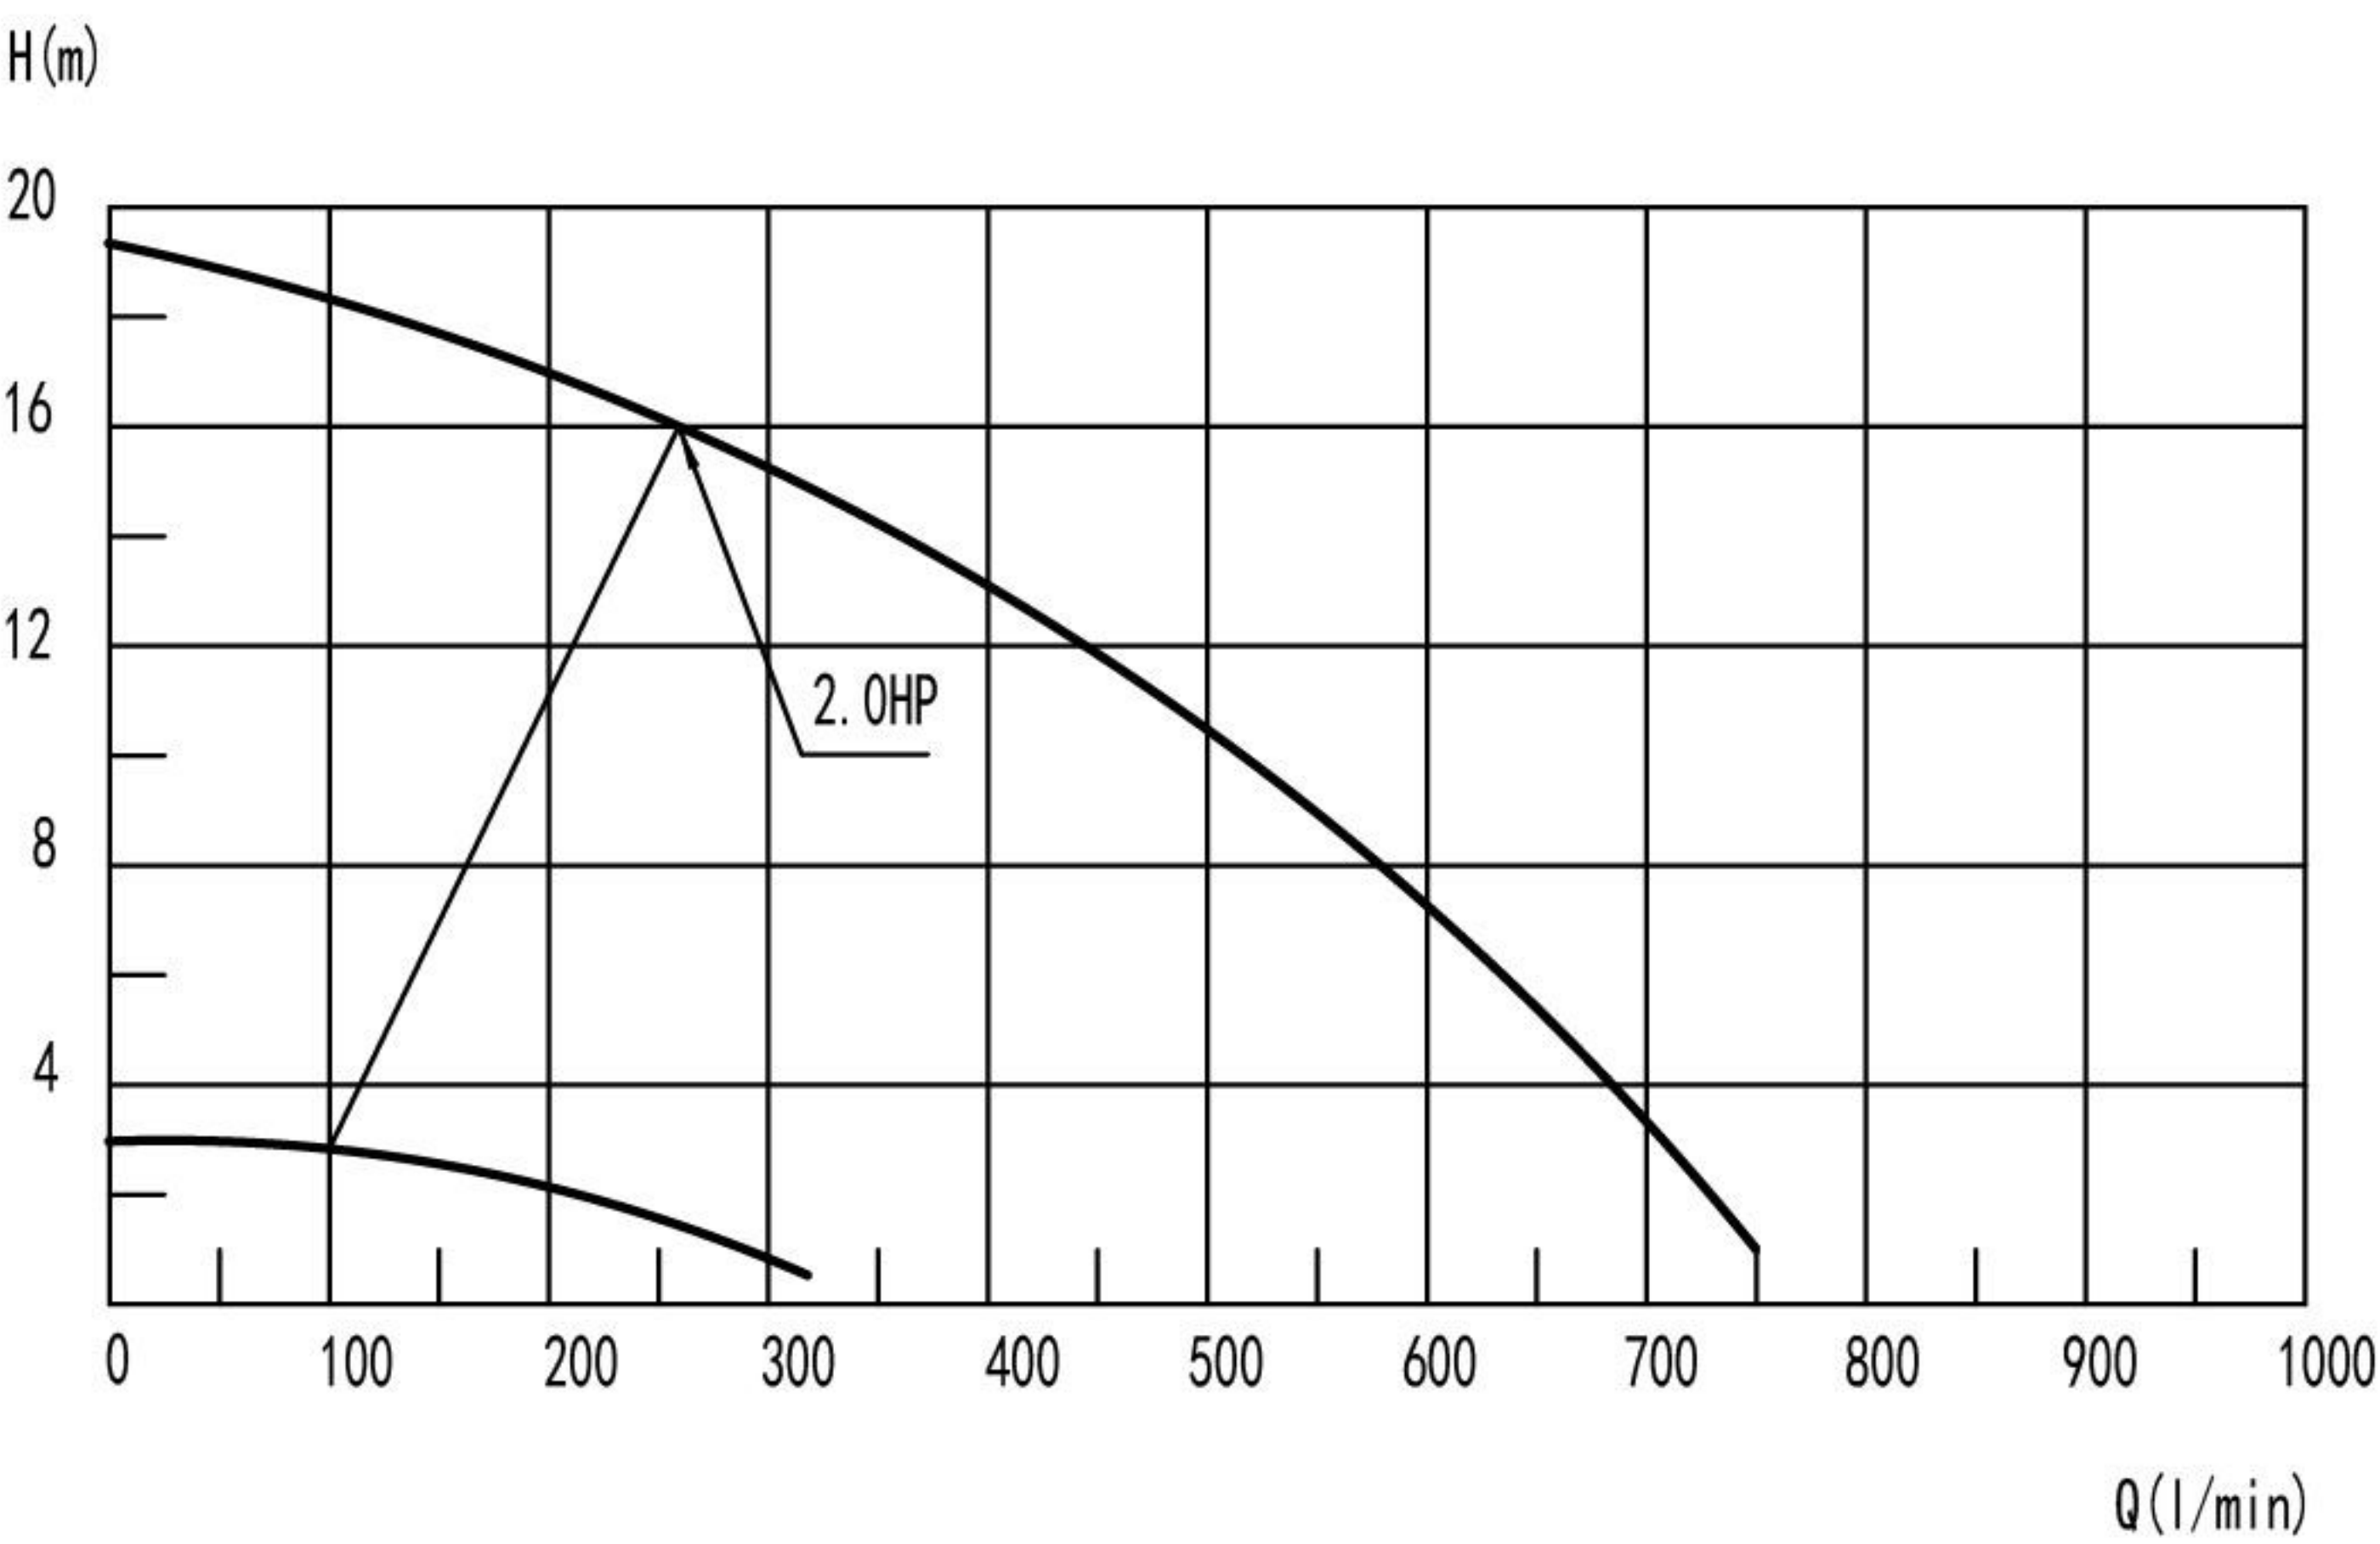

- K60335-1, K60335-2-41, K00014-1
- E351970
- EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008
- EN 60335-1:2012/A2:2019
EN 60335-2-41:2003/A2:2010
EN 62233:2008

技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum Lift (m)	最大流量 Maximum Flow (l/min)	绝缘等级 Insulation Class	防护等级 Protection Grade	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP							
DXD-320ES	230v/50Hz	(high speed) 1.5	2.0	2850	19.0	733	F	IP X5	20.0	
		(low speed) 0.4	0.6	1450	3.0	317				
DXD-320FS	230v/60Hz	(high speed) 1.5	2.0	3450	19.0	733	F	IP X5	20.0	
		(low speed) 0.4	0.6	1725	3.0	317				
DXD-320GS	115v/60Hz	(high speed) 1.5	2.0	3450	19.0	733	F	IP X5	20.0	
		(low speed) 0.4	0.6	1725	3.0	317				

包装 (Packing): 430mm×215mm×250mm