
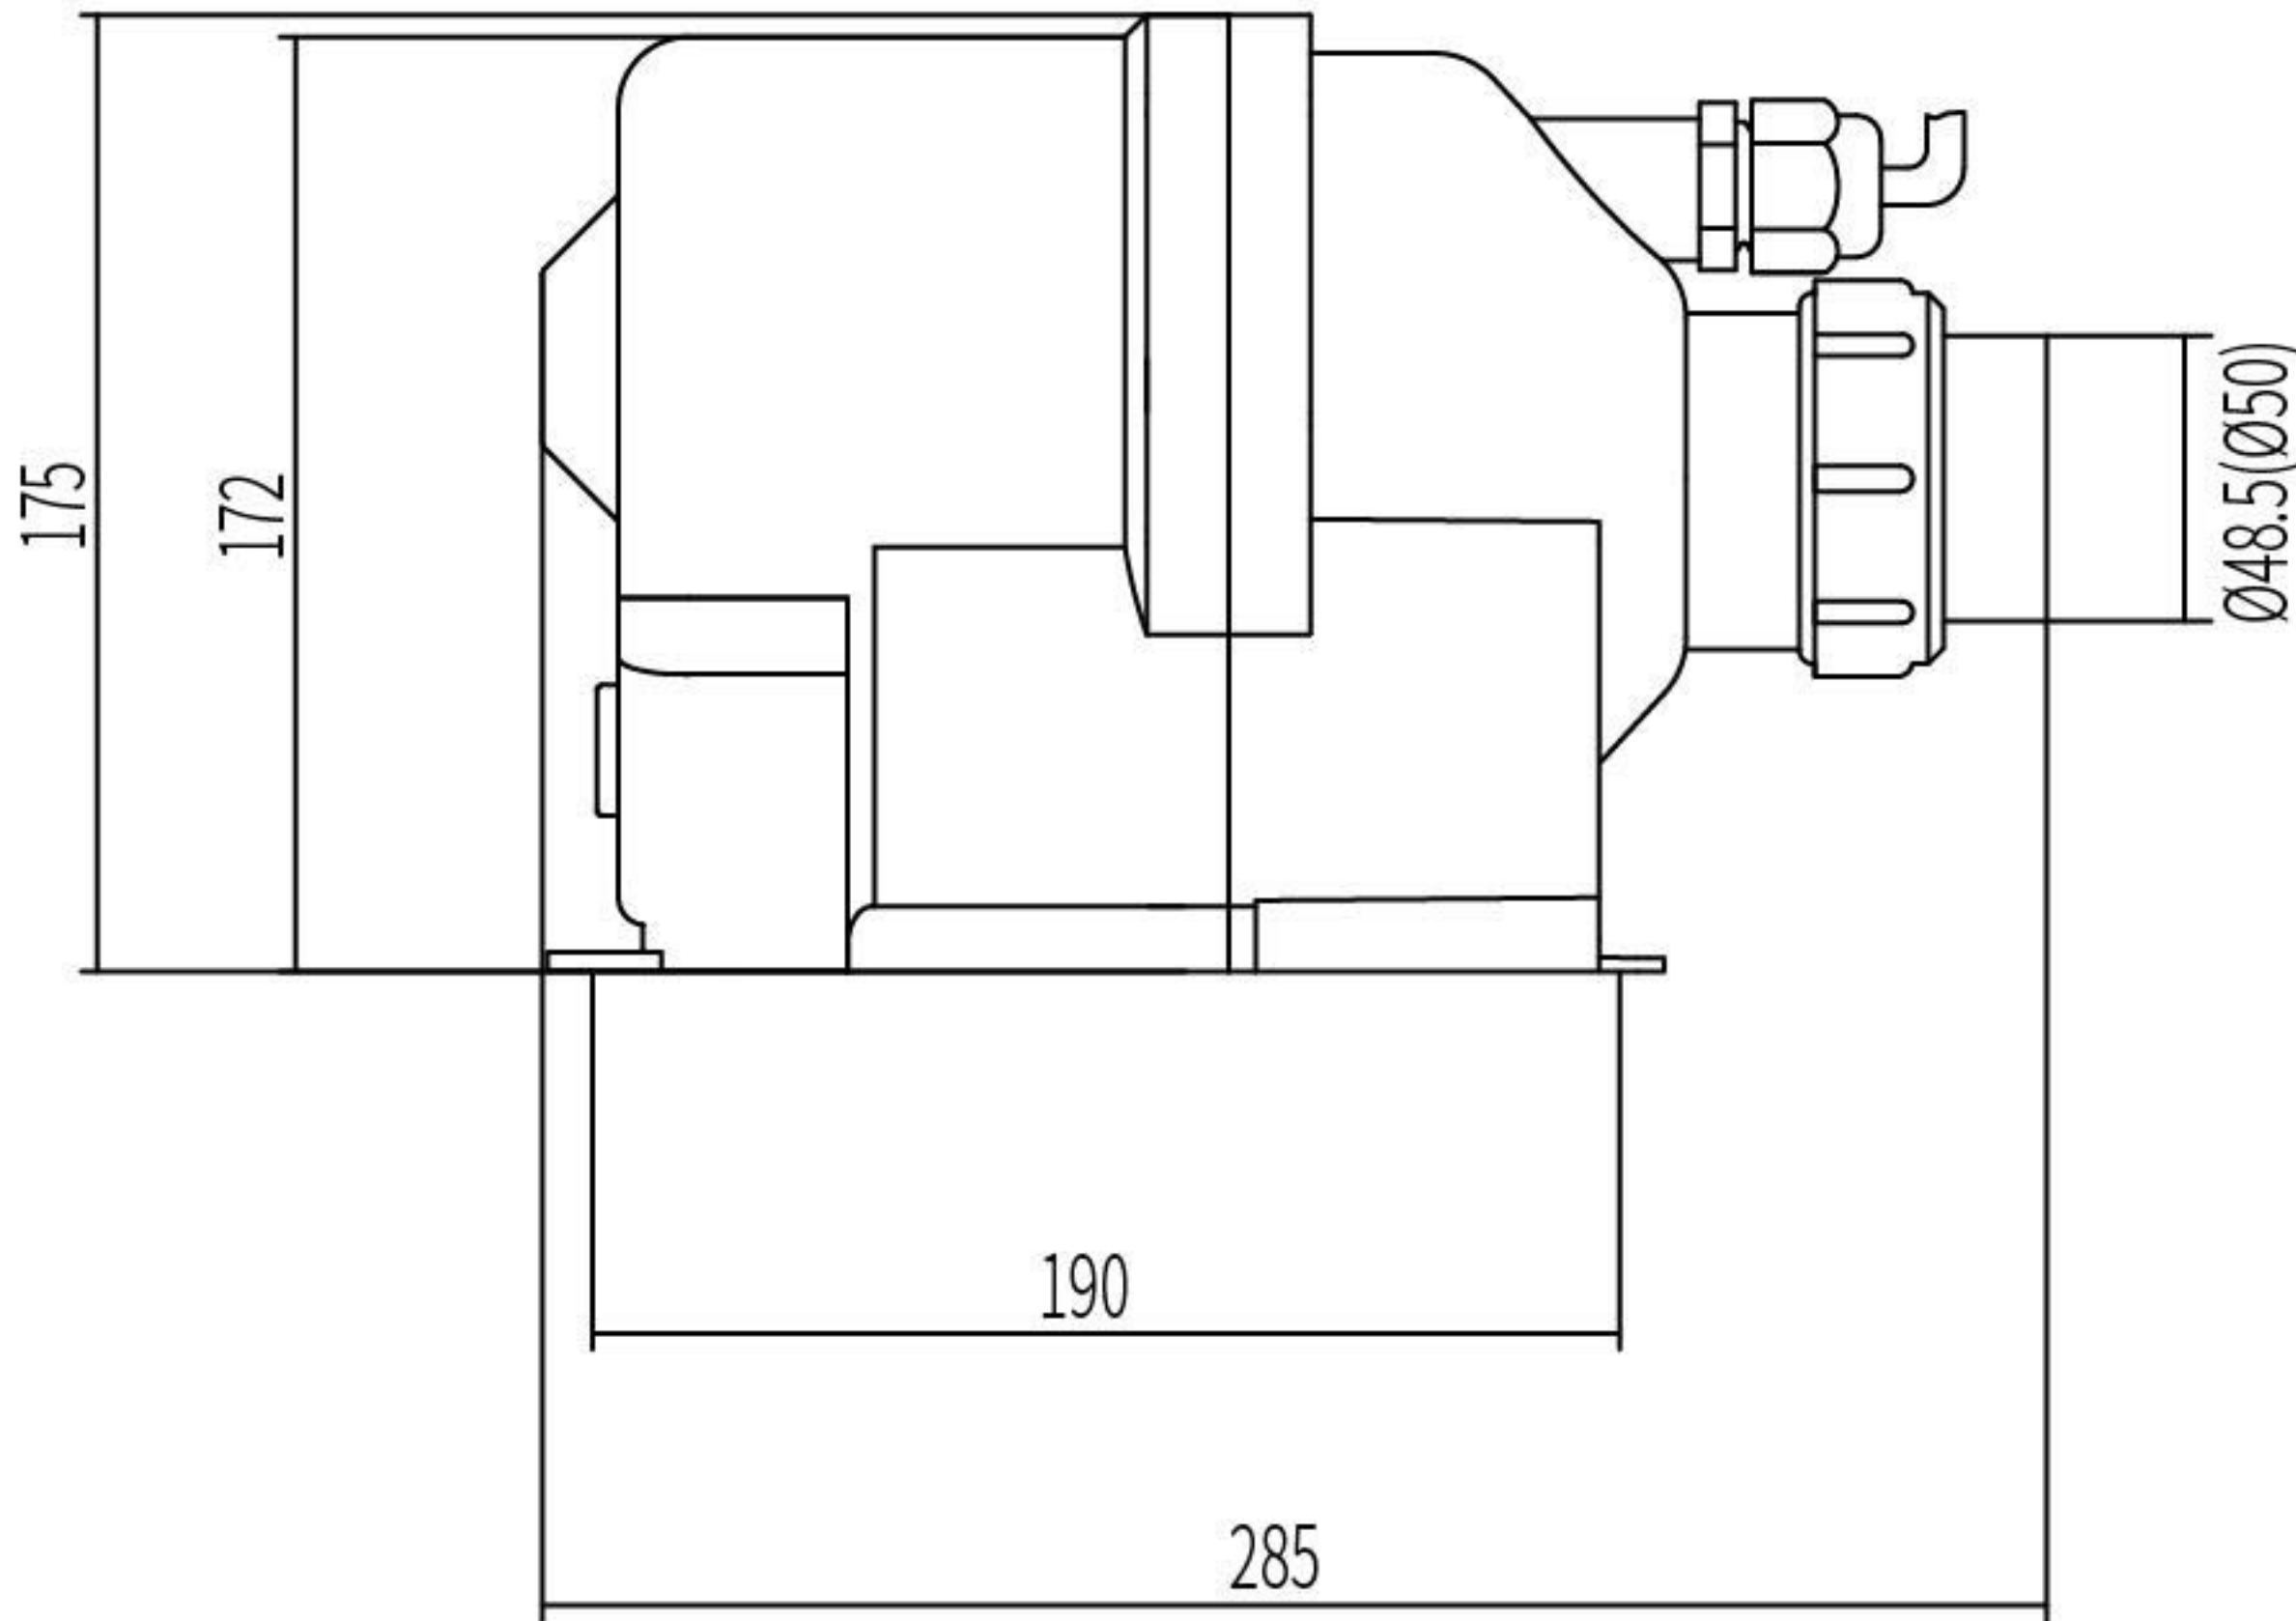


DXD-6X

工作条件 Working Conditions

输送介质:干燥空气
 环境温度:≤50℃
 最大工作压力:0.1Mpa
 Conveying Medium: Dry Air
 Environmental Temperature:≤50℃
 Max. Working Pressure: 0.1Mpa

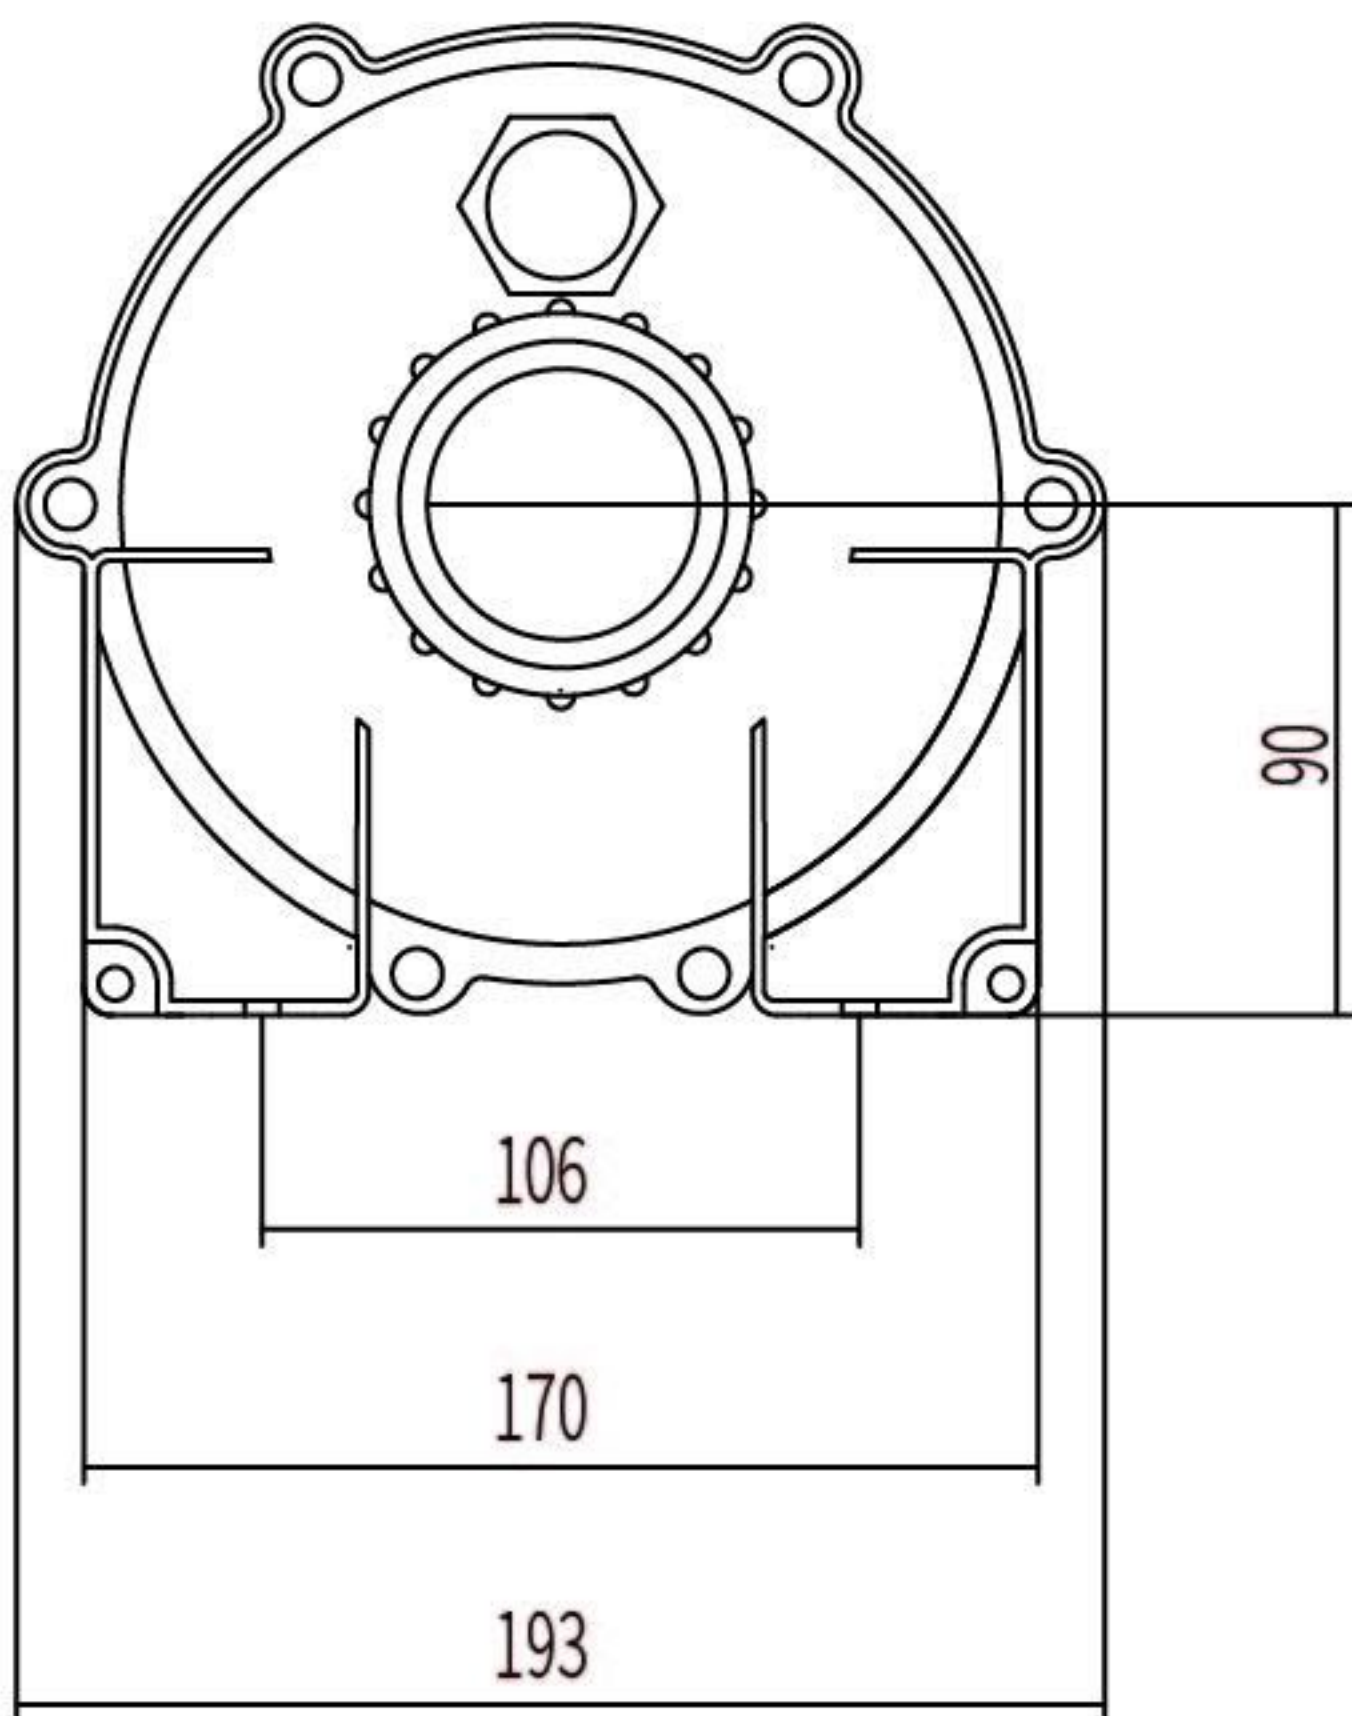

- IEC 60335-1:2010
- IEC 60335-1:2010/AMD1:2013
- IEC 60335-1:2010/AMD2:2016
- IEC 60335-2-60:2017
- AS/NZS 60335. 2. 60:2018
- AS/NZS 60335. 1:2011 Inc A1-5
- E351971
- EN 60335-1:2012/A2:2019
- EN 60335-2-60:2003/A12:2010
- EN 60335-1:2012/A2:2019
- EN 60335-2-60:2003/A2:2010

技术参数 Technical Parameter List

型号 Model	电压 Voltage	功率 Power		转速 Rotating Speed (r/min)	风速 Wind Speed (Km/h)	噪音 Noise(dB)	绝缘等级 Insulation Class	防护等级 Protection Grade	毛重 Gross Weight (kg)	认证 Certification
		Kw	HP							
DXD-6X-450	230v/50Hz/60Hz	0.45	0.6	30000	80	75	F	IP X5	3.0	
DXD-6X-750	230v/50Hz/60Hz	0.75	1.0	32000	80	80	F	IP X5	3.0	
DXD-6X-1000	230v/50Hz/60Hz	1.0	1.5	36000	85	85	F	IP X5	3.0	
DXD-6-1000	115v/50Hz/60Hz	1.0	1.5	36000	85	85	F	IP X5	3.0	

包装 (Packing): 310mm×210mm×200mm